

Newlec® Instructions

1-Channel 7 Day Electronic Timer - NLCUT1A


⚠ Safety Information

The connection and installation of electrical must be performed by a skilled electrician only. Any intervention into or modifications to the appliance shall lead to the lapse of all warranty rights. Comply with your national regulations and all relevant safety stipulations.


Technical Specifications

- **Rated Voltage:** 230 - 240v +6% - 10%
- **Frequency:** 50 - 60Hz
- **Power Consumption:** Approx 1W
- **Contact:** zero-potential, gap less than 3mm
- **Switching power:** 16A, 250V~, cosφ=1;
10A, 250V~, cosφ=0.6
- **On/ Off operation:** 16 On/Off
32 times pulse output
10 times holiday settings
- **Incandescent lamp load:** 2300W
- **Halogen lamp load:** 2300W
- **Timing basic:** Quartz
- **Working precision:** ±1 sec./day at 20°C
- **Shortest switching time:** 1 minute
- **Display:** LCD display with text line
- **Operating control elements:** 4 touch keys and 1 reset key
- **Power reserve:** 100 hours with display with full controllability (temp. 20°C) by means of an environmentally friendly lithium battery
Permissible ambient temperature: -20°C to +55°C
- **Weight:** approx 170g

■ DIMENSIONS

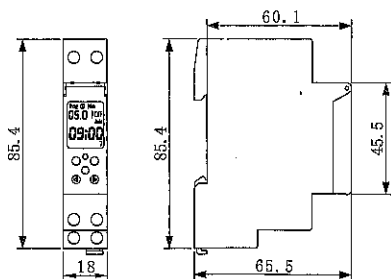

■ WIRING DIAGRAM

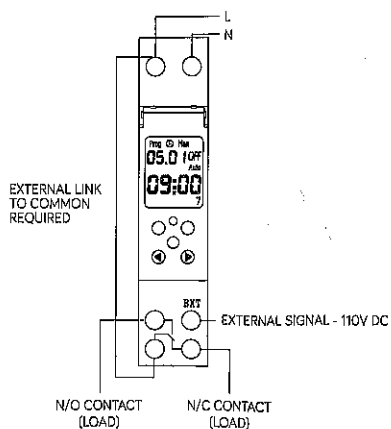

Quick Start Guide

Setting Year, Date and Time:

- Step 1:** Press Menu button until clock symbol is flashing – press OK
- Step 2: Setting Year** Use + - keys to change numbers and Press OK to set and to move to next parameter
- Step 3: Setting Month** Use + - keys to change numbers and Press OK to set and to move to next parameter.
- Step 4: Setting Day** Use + - keys to change numbers and Press OK to set and to move to next parameter.
- Step 5: Setting Time** Use + - keys to change numbers and Press OK to set and to move to next parameter.
- Step 6:** Press Menu to save

Setting Program (7 days a week)

- Step 1:** Press MENU button until PROG symbol is flashing – press OK
- Step 2:** Press OK to select 1st ON program
- Step 3:** Press Menu to set time of 1st ON program
- Step 4:** Use + - keys to change numbers and press OK to set and to move to next parameter.
- Step 5:** Set frequency of program – 1-to-7. (1= Every Monday, 7= 7days a week)
- Step 6:** DEL appears on screen and 1 flashes at bottom of screen. Use + key until 7 flashed (for 7days a week program). Press OK
- Step 7:** Press OK to select 1st OFF program
- Step 8:** Press Menu to set time of 1st OFF program
- Step 9:** Use + - keys to change numbers and press OK to set and to move to next parameter.
- Step 10:** Set frequency of program – 1-to-7. (1= Every Monday, 7= 7days a week)
- Step 11:** DEL appears on screen and 1 flashes at bottom of screen. Use + key until 7 flashes (for 7days a week program). Press OK
- Step 11:** Press MENU to save program or repeat process to set 2nd ON/OFF program
- Note:** For additional setting functionality please review the illustration overleaf

